

EMC TEST REPORT

Product Name Active Stylus Pen

Trade mark /

Model No. G2

Report No. CTB210624028EX

Applicant Dongguan xiaochuang Electronic Technology Co., Ltd.
Room 802, no. 12, lane 11, nance wenming road, humen town,
dongguan city China.

Manufacturer Dongguan xiaochuang Electronic Technology Co., Ltd.
Room 802, no. 12, lane 11, nance wenming road, humen town,
dongguan city China.

Prepared by Shenzhen CTB Testing Technology Co., Ltd.
Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan
District, Shenzhen China

Date of Receipt 2021-06-21

Date of Test(s) 2021-06-21~ 2021-06-24

Date of Issue 2021-06-24

Test Standard(s) CFR47, FCC Part 15 Subpart B, ANSI C63.4: 2014

Test Result: Pass

In the configuration tested, the EUT complied with the standards specified above.

Blake Cai

Blake Cai/ Project Handler

Zeck Zhu

Zeck Zhu/Reviewer



Bin Mei/Manager

Note: The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report shall not be reproduced except in full, without prior written approval of CTB. This document may be altered or revised by CTB, personnel only, and shall be noted in the revision of the document.

Table of Contents

1.	Description of version.....	3
2.	Test summary.....	4
3.	Measurement uncertainty	5
4.	General information	6
4.1.	Description of EUT.....	6
4.2.	Description of accessory device.....	6
4.3.	Test conditions.....	6
4.4.	Block diagram of EUT configuration	6
4.5.	Operating condition of EUT	7
5.	List of Test and Measurement Instruments.....	8
6.	Conducted Emission.....	9
6.1.	Limit.....	9
6.2.	Test setup	9
6.3.	EMI test receiver setup	9
6.4.	Test procedure.....	9
6.5.	Test results	10
7.	Radiated emissions	12
7.1.	Limit.....	12
7.2.	Test setup	12
7.3.	EMI test receiver setup and spectrum analyzer setup	13
7.4.	Test procedure.....	13
7.5.	Corrected Amplitude & Margin Calculation.....	13
7.6.	Test results	14
8.	Photographs of test setup.....	16
9.	Photographs of EUT	17

1. Description of version

Report No.	Issue Date	Description	Approved
CTB210624028EX	2021-06-24	Original	Valid

2. Test summary

Test procedures according to the technical standards:

Standard	Test Item	Test Result
§15.107	Conducted Emission	PASS
§15.109	Radiated Emission	PASS

3. Measurement uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard

Test Item	Frequency	Expanded Uncertainty (U_{Lab})
Conducted Emission	150 kHz to 30 MHz	± 3.2 dB
Radiated Emission	30 MHz to 1000 MHz	± 4.8 dB

uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %

4. General information

4.1. Description of EUT

Product name	Active Stylus Pen
Trade mark	/
Model No.	G2
Serial No.	/
Model Difference	/
Rated Power	0.5W
Normal Testing Voltage	DC 5V from adapter
Configuration	☒ Table-top ☐ Floor-standing
Adapter Information:	/

Note: The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

4.2. Description of accessory device

No.	Device Type	Brand	Model	Specification	Note

4.3. Test conditions

Temperature: 15-25°C

Relative Humidity: 30-60 %


Atmospheric pressure: 800hPa-1060hPa

4.4. Block diagram of EUT configuration

CHARGE



WORKING



4.5. Operating condition of EUT

Operating condition	Mode 1*	Charging	Test Voltage	AC 120V/50Hz
	Mode 2	Discharge	Test Voltage	DC 5V

Note: This test covers all possible operating modes of the device, only the worst data are list in report.
The worst data are shows (*) is the nearest standard limit which were recorded in this report.

5. List of Test and Measurement Instruments

Conducted Emission Measurement					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	2021.09.27
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2021.09.27
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCS30	834115/006	2021.09.27
4	Coaxial cable	ZDECL	Z302S	18091904	2021.09.27
5	AAN	Schwarzbeck	NTFM8158	6114	2021.09.27
6	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated Emission Measurement					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2021.11.01
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2021.11.01
3	Amplifier	Agilent	8449B	3008A01838	2021.09.27
4	Amplifier	HP	8447E	2945A02747	2021.09.27
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2021.09.27
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2021.09.27
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2021.09.27
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2021.09.27
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2021.09.27
10	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. Conducted Emission

6.1.Limit

☒ Except for Class A devices:


Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

Note: Decreases with the logarithm of the frequency.

☐ For Class A devices:

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	79	66
0.5-30	73	60

6.2.Test setup

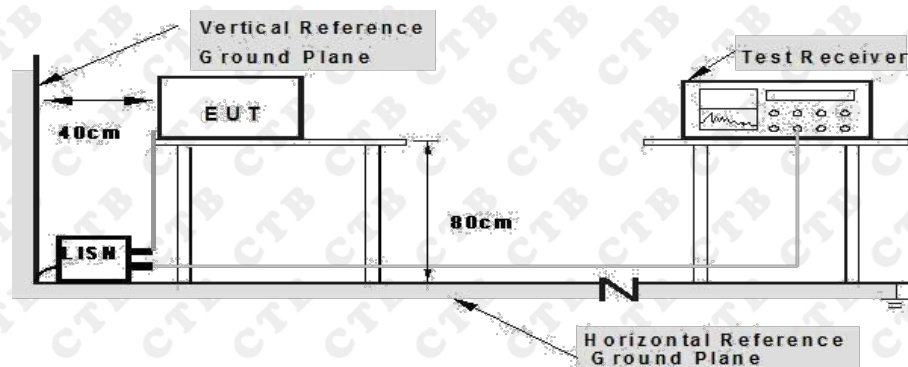

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

The setup of EUT is according with ANSI C63.4 measurement procedure. Specification used with FCC Part 15 limits.

6.3.EMI test receiver setup


Frequency Range	9kHz-30MHz
Resolution Bandwidth	200Hz (9kHz-150kHz) 9kHz (150kHz-30MHz)

6.4.Test procedure

1. Measurement was performed in shielded room, and instruments used were followed clause 4 of ANSI C63.4.
2. Detailed test procedure was following clause 7 of ANSI C63.4.
3. Frequency range 150kHz – 30MHz was checked and EMI receiver measurement bandwidth was set to 9 kHz.

6.5. Test results


Phase : L

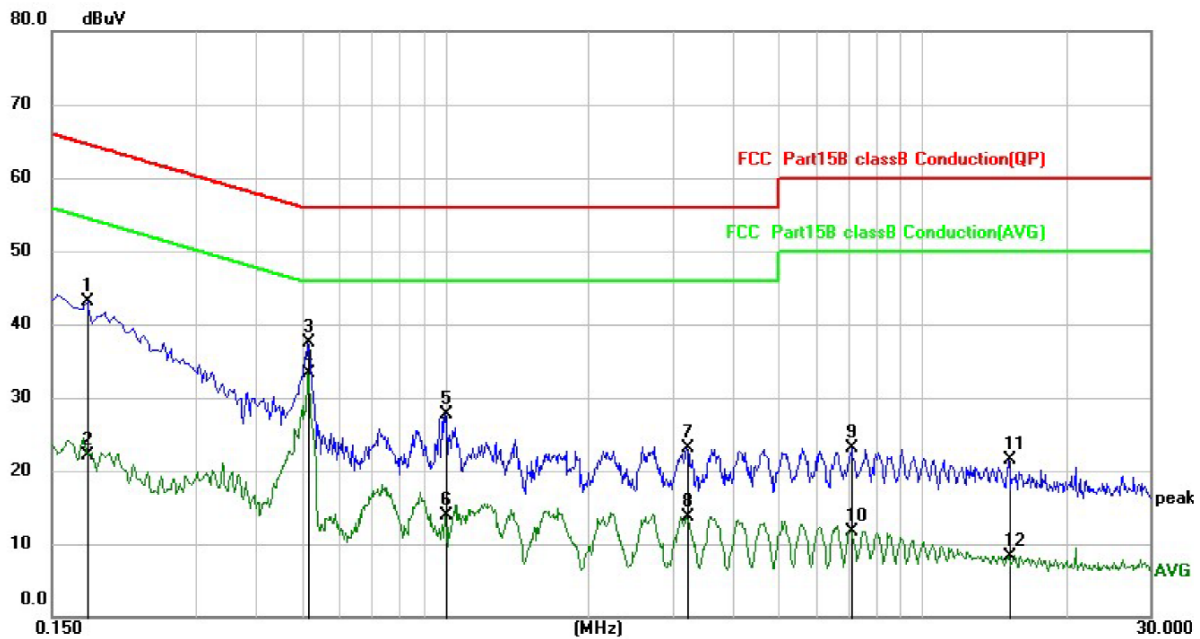

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.1780	33.22	9.96	43.18	64.58	-21.40	QP
2		0.1780	12.20	9.96	22.16	54.58	-32.42	AVG
3		0.5180	27.53	9.96	37.49	56.00	-18.51	QP
4	*	0.5180	23.40	9.96	33.36	46.00	-12.64	AVG
5		1.0020	17.82	9.96	27.78	56.00	-28.22	QP
6		1.0020	4.03	9.96	13.99	46.00	-32.01	AVG
7		3.2220	13.08	10.08	23.16	56.00	-32.84	QP
8		3.2220	3.59	10.08	13.67	46.00	-32.33	AVG
9		7.1180	12.69	10.44	23.13	60.00	-36.87	QP
10		7.1180	1.35	10.44	11.79	50.00	-38.21	AVG
11		15.1620	10.53	10.98	21.51	60.00	-38.49	QP
12		15.1620	-2.64	10.98	8.34	50.00	-41.66	AVG

Note: Result=Reading + Factor
Over Limit=Result - Limit

Phase : N

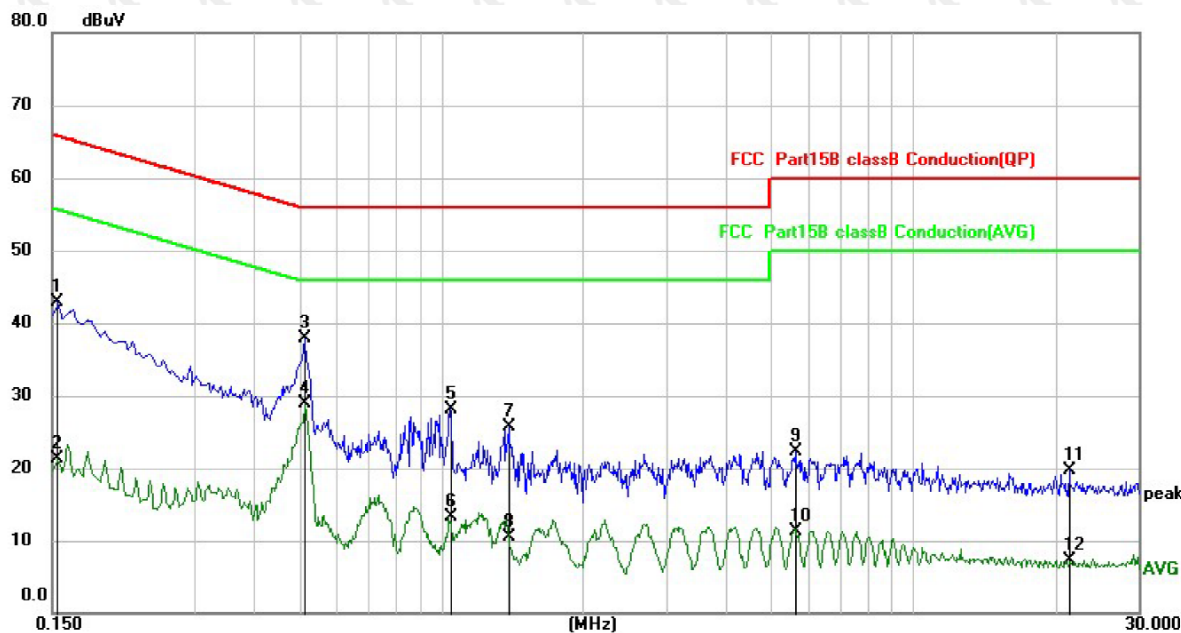

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.1539	32.89	9.96	42.85	65.79	-22.94	QP
2		0.1539	11.32	9.96	21.28	55.79	-34.51	AVG
3		0.5140	28.00	9.96	37.96	56.00	-18.04	QP
4	*	0.5140	18.95	9.96	28.91	46.00	-17.09	AVG
5		1.0460	18.07	9.96	28.03	56.00	-27.97	QP
6		1.0460	3.40	9.96	13.36	46.00	-32.64	AVG
7		1.3900	15.68	9.98	25.66	56.00	-30.34	QP
8		1.3900	0.58	9.98	10.56	46.00	-35.44	AVG
9		5.6260	12.00	10.25	22.25	60.00	-37.75	QP
10		5.6260	1.05	10.25	11.30	50.00	-38.70	AVG
11		21.4580	8.47	11.16	19.63	60.00	-40.37	QP
12		21.4580	-3.82	11.16	7.34	50.00	-42.66	AVG

Note: Result=Reading + Factor
Over Limit=Result – Limit

7. Radiated emissions

7.1. Limit

☒ Except for Class A devices (at 3m):


Frequency of emission (MHz)	Field strength (microvolts/meter)	
	(microvolts/meter)	(dB μ V/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

☐ For Class A devices (at 10m):


Frequency of emission (MHz)	Field strength (microvolts/meter)	
	(microvolts/meter)	(dB μ V/m)
30-88	90	39
88-216	150	43.5
216-960	210	46.4
Above 960	300	49.5

7.2. Test setup

Radiated Emission Test Set-Up Frequency Below 1 GHz

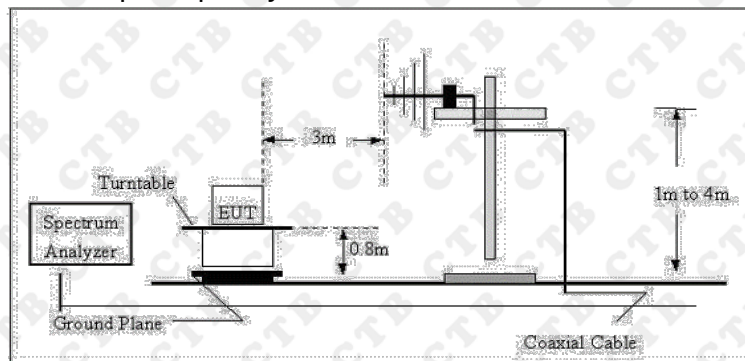

Radiated Emission Test Set-Up Frequency Above 1GHz

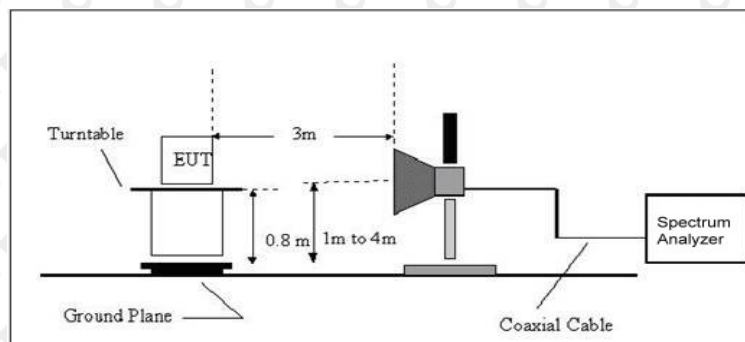

The radiated tests wer performed in 3 meter Charmber test site, using the setup accordance with the ANSI C63.4:2014.

7.3.EMI test receiver setup and spectrum analyzer setup

During the radiated emission test, the EMI test receiver and Spectrum Analyzer were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz-1000MHz	100kHz	300kHz	120kHz	QP
Above 1GHz	1MHz	3MHz	/	PK
	1MHz	10Hz	/	AVG

7.4.Test procedure

1. The measurement was performed in a semi-anechoic chamber, and instruments used were followed clause 4 of ANSI C63.4
2. Detailed test procedure was following clause 8 of ANSI C63.4.

7.5.Corrected Amplitude & Margin Calculation

1. The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:


$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

2. The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

7.6. Test results


Polarization :H

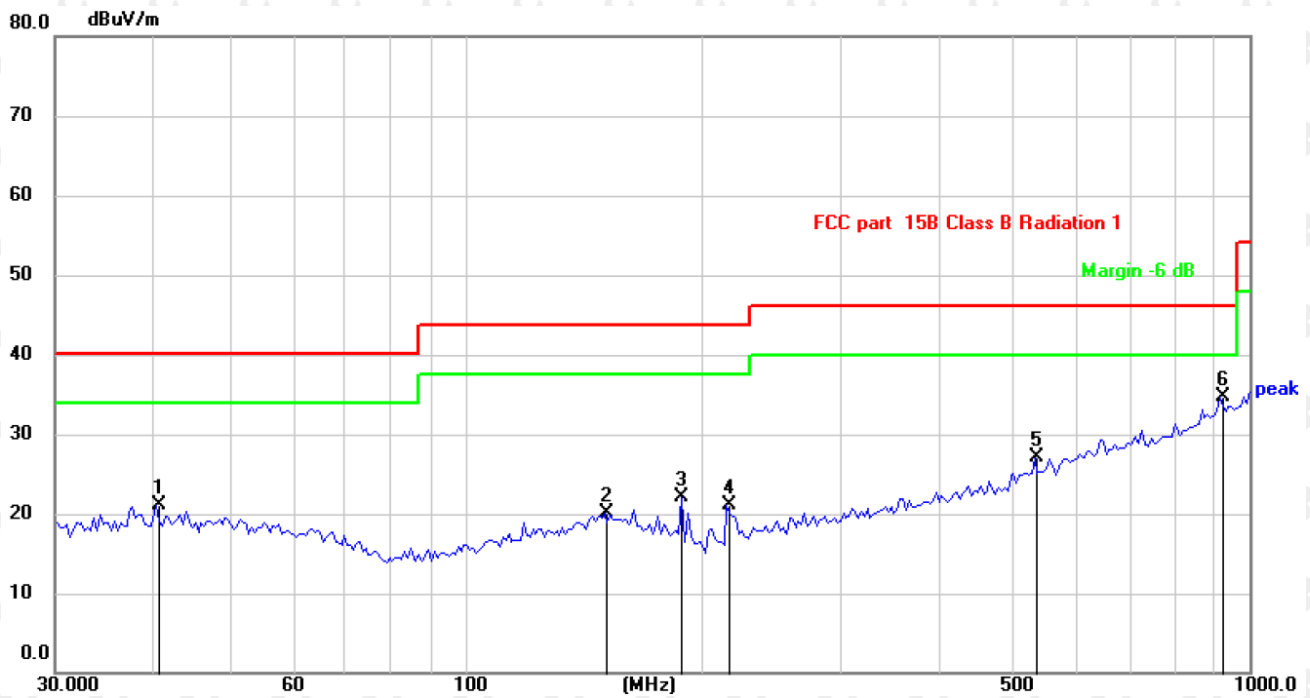

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		40.4172	27.90	-6.79	21.11	40.00	-18.89	QP
2		150.5378	27.12	-6.97	20.15	43.50	-23.35	QP
3		189.0743	31.72	-9.56	22.16	43.50	-21.34	QP
4		215.6456	30.59	-9.42	21.17	43.50	-22.33	QP
5		531.9635	28.42	-1.32	27.10	46.00	-18.90	QP
6	*	916.0687	28.03	6.63	34.66	46.00	-11.34	QP

Note: Result=Reading+Factor
Over Limit=Result-Limit

Polarization :V

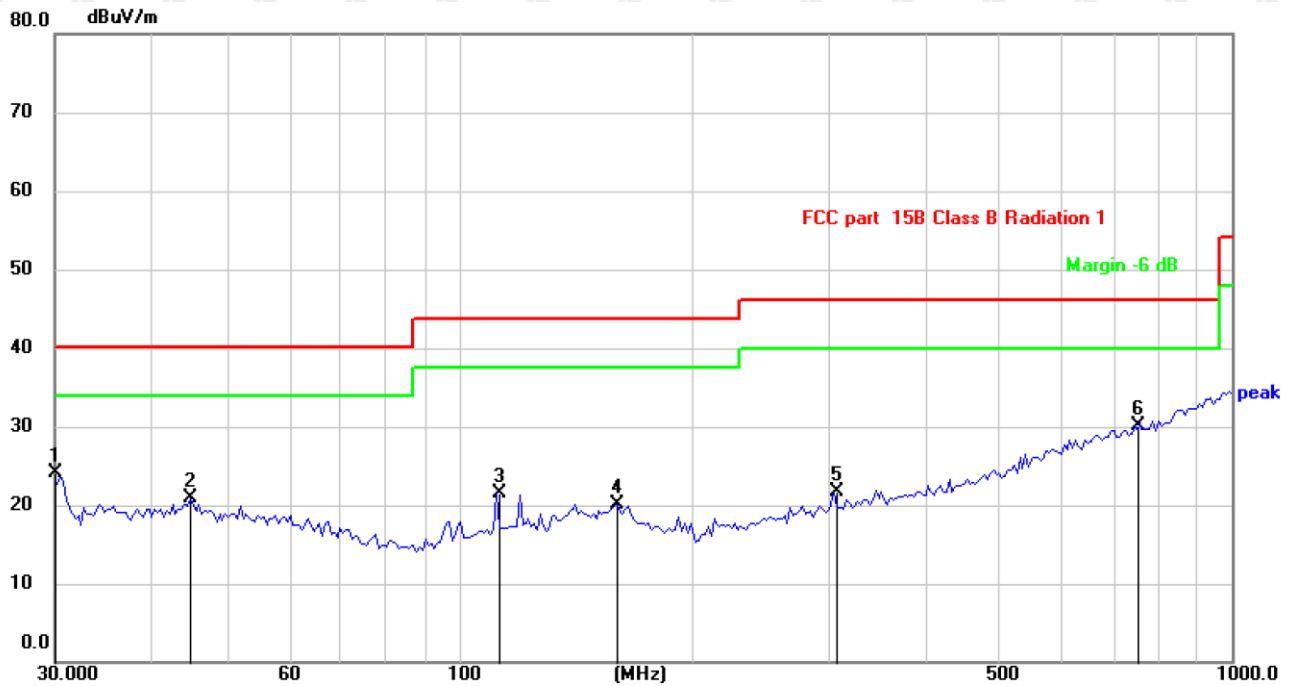

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	30.0000	32.59	-8.39	24.20	40.00	-15.80	QP
2		44.9006	27.73	-6.92	20.81	40.00	-19.19	QP
3		111.7380	30.77	-9.25	21.52	43.50	-21.98	QP
4		160.0648	26.79	-6.60	20.19	43.50	-23.31	QP
5		306.2164	28.27	-6.63	21.64	46.00	-24.36	QP
6		748.7943	26.63	3.39	30.02	46.00	-15.98	QP

Note: Result=Reading+Factor
Over Limit=Result-Limit

8. Photographs of test setup

Radiated Emission




Conducted Emission




9. Photographs of EUT

EUT photo 1

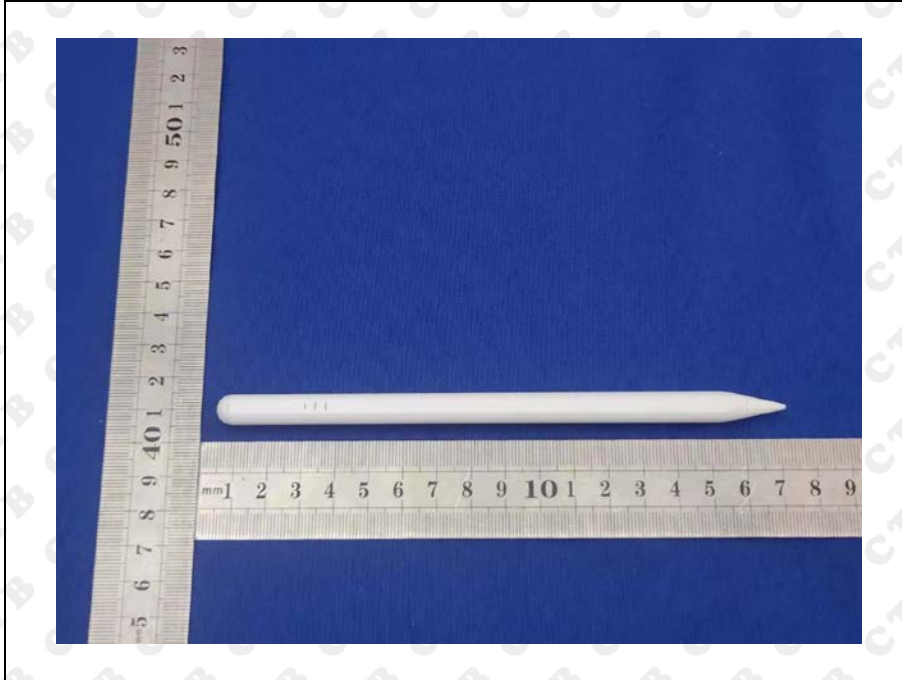

EUT photo 2

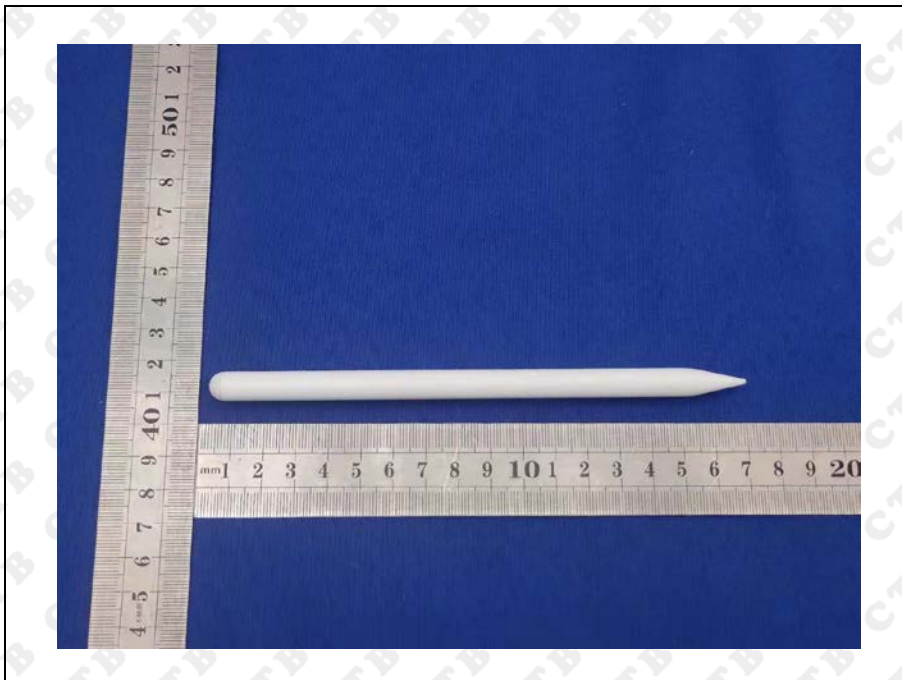

EUT photo 3



End of report